


D & E Architectural Hardware Ltd

Fitting Instructions for Goom Tirex

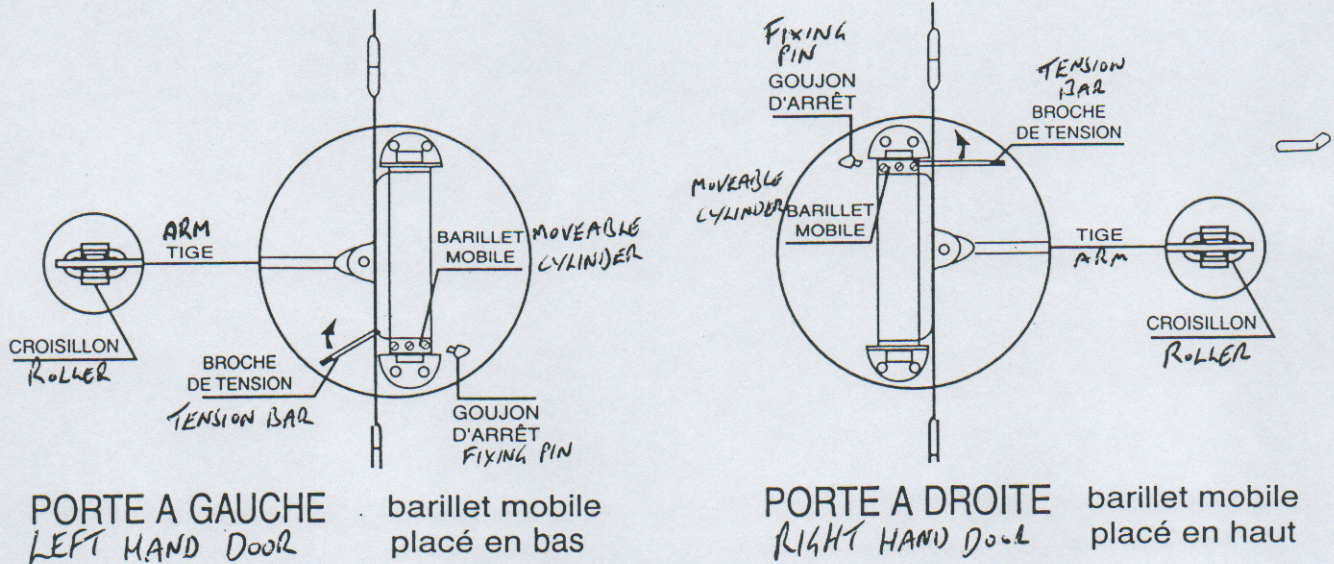

The Tirex spring door closer, closes the push side of the door.

- Fit on door already hung.
- Place on the opening face of the door.

- 1 - Fix the cylinder on the frame as close as possible to the centre line of the hinge as shown above.
- 2 - Put the arm perpendicular to the cylinder; fit the roller to the end of the arm. This must be placed on the roller not between roller and door.

When using a double roller ensure that the arm passes between the 2 rollers before fixing as near to the end of the arm as possible, this will then remain captured between the arms.

- 3 - Adjust the spring to required tension using the capstan in the direction of rotation shown above, and fit the pin in the hole furthest from the hinge (drawing above).

To cancel the effect of Tirex.

- With single roller, one can free the arm but only when the spring has been released by removing the pin using the tension bar. If the bar is removed before releasing the spring, the door or the closer can be damaged.
- With double roller the arm is retained but the effect of the Tirex can be cancelled by removing the locking pin.